K系列-TGG 直式插头-电缆线夹和带护套型的尾盖






■ 定位销(G)或定位销(A...F,L和R), 电缆线夹和带护套型的尾盖

技术参数

插拔次数:	>5000次
湿度:	在60°C时最高达95%
温度范围:	-45°C ~ +125°C
抗振动性能:	10-20000 Hz,15g
抗冲击性能:	100g,6ms
盐雾腐蚀试验:	>96 h
防护等级:	IP68



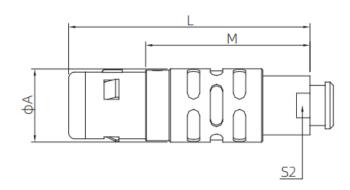

编号(Model)		尺寸(Size)				适配电缆夹(Adapted collet)	
型号(Type)	系列(Series)	А	L	M	52	最小(Min.)	最大(Max.)
TGG	OK	11.0	34.0	23.0	8.0	3.2	5.2
TGG	1K	13.0	42.0	28.0	9.0	4.2	7.2
TGG	2K	16.0	52.0	36.0	12.0	5.2	10.2
TGG	3K	19.0	61.0	41.0	15.0	5.2	14.2

订购产品

K系列-TGG 直式插头-电缆线夹和带护套型的尾盖



