## T系列-DHG 浮动式插座






■ 电缆线夹

## 技术参数

插拔次数:	>1000次
湿度:	在60℃时最高达95%
温度范围:	-55℃ ~ +200℃
抗振动性能:	10-2000 Hz,15g
抗冲击性能:	100g,6ms
盐雾腐蚀试验:	>96 h
防护等级:	IP68
屏蔽效果:	在10MHz下>95dB;在1GHz下>80dB



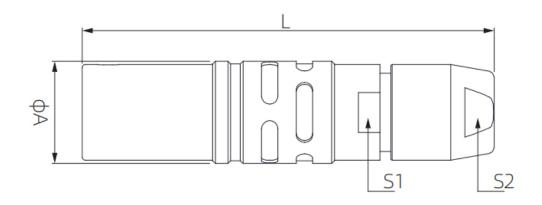

编号(Model)		尺寸(Size)			线缆外径φ		
型号(Type)	系列(Series)	А	L	М	<b>S</b> 1	最小(Min.)	最大(Max.)
DHG	TT	7.0	32.0	5.5	5.0	2.4	3.0
DHG	OT	9.5	38.0	7.5	7.0	1.0	5.0
DHG	1T	12.0	43.5	11.0	9.0	1.3	6.5
DHG	2T	15.0	52.0	14.0	12.0	1.3	8.5
DHG	3T	18.8	61.5	16.0	14.0	2.6	10.5

## 订购产品

## T系列-DHG 浮动式插座



