T系列-DHG 浮动式插座-尾盖






■ 电缆线夹和带护套型的尾盖

技术参数

22.1.2.20			
插拔次数:	>1000次		
湿度:	在60℃时最高达95%		
温度范围:	-55℃ ~ +200℃		
抗振动性能:	10-2000 Hz,15g		
抗冲击性能:	100g,6ms		
盐雾腐蚀试验:	>96 h		
防护等级:	IP68		
屏蔽效果:	在10MHz下>95dB;在1GHz下>80dB		



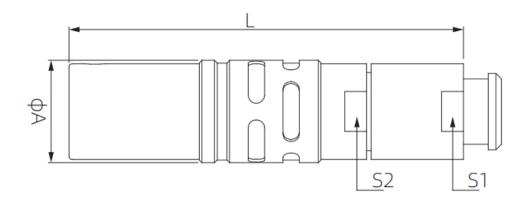


编号(Model)	尺寸(Size)			线缆外径φ		
型号(Type)	系列(Series)	Α	L	M	S 1	最小(Min.)	最大(Max.)
DHG	TT	7.0	31.5	5.5	6.0	2.4	3.0
DHG	OT	9.5	37.0	7.5	7.0	1.0	5.0
DHG	1T	12.0	42.5	11.0	9.0	1.3	6.5
DHG	2T	15.0	51.0	14.0	12.0	1.3	8.5
DHG	3T	18.8	60.0	16.0	14.0	2.6	10.5

订购产品

T系列-DHG 浮动式插座-尾盖



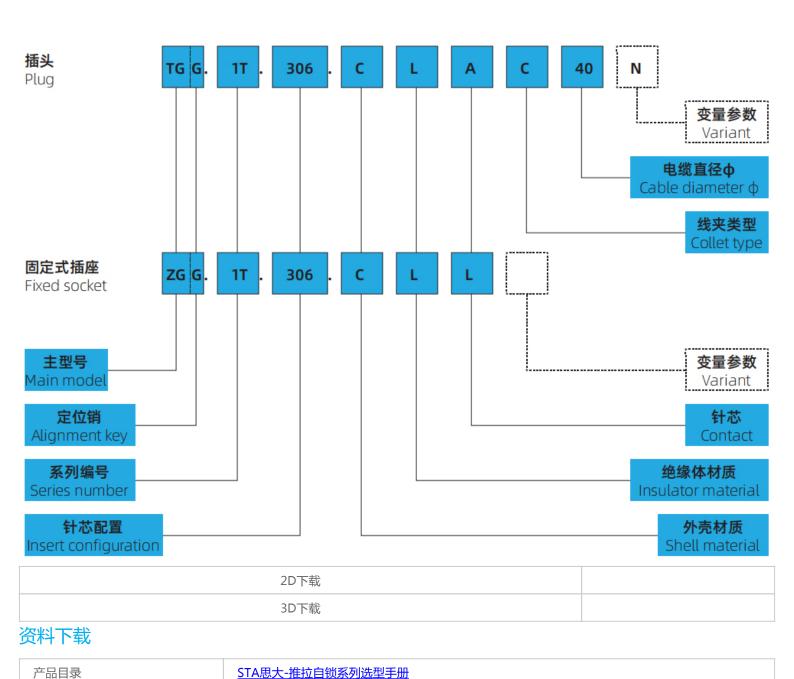

3/3