



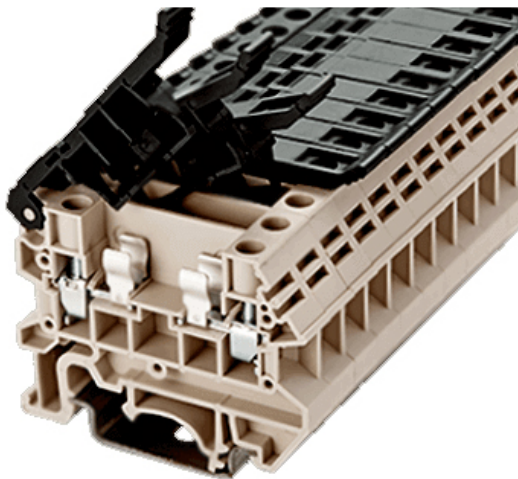


DK4N-TF(5X20)

安规认证 		
规格	UL	IEC
额定电压	600V	800V
额定电流	12A	12A
单芯线(AWG/mm²)	22~10 / 0.14~4	
多芯线(AWG/mm²)	22~10 / 0.14~4	
冲击耐压	6KV	
扭力(N·m)	0.53	
螺丝	M3	
剥线长度	8~10mm	
绝缘材料	PA	
TxHxW(mm)	8x42.7x53.3	
包装量	50	



DK4N-TFL(5x20)


安规认证 		
规格	UL	IEC
额定电压	600V	800V
额定电流	12A	12A
单芯线(AWG/mm²)	22~10 / 0.14~4	
多芯线(AWG/mm²)	22~10 / 0.14~4	
冲击耐压	6KV	
扭力(N·m)	0.53	
螺丝	M3	
剥线长度	8~10mm	
绝缘材料	PA	
TxHxW(mm)	8x42.7x53.3	
包装量	50	

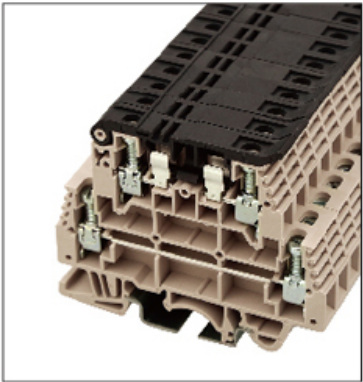

DK4-TF(5X20)		
安规认证 		
规格	UL	IEC
额定电压	300V	800V
额定电流	16A	6.3A
单芯线(AWG/mm²)	24~12 / 0.5~4	
多芯线(AWG/mm²)	24~12 / 0.5~4	
冲击耐压	8KV	
扭力(N·m)	0.8	
螺丝	M3	
剥线长度	10~12mm	
绝缘材料	PA	
TxHxW(mm)	8x55x60.5	
包装量	50	

DK4-TFL(5X20)		
安规认证 		
规格	UL	IEC
额定电压	300V	800V
额定电流	16A	6.3A
单芯线(AWG/mm²)	24~12 / 0.5~4	
多芯线(AWG/mm²)	24~12 / 0.5~4	
冲击耐压	8KV	
扭力(N·m)	0.8	
螺丝	M3	
剥线长度	10~12mm	
绝缘材料	PA	
TxHxW(mm)	8x55x60.5	
包装量	50	

DKK4-TF(5X20)		
安规认证 		
规格	UL	IEC
额定电压	300V	800V
额定电流	30A	30A
单芯线(AWG/mm²)	22~10 / 0.5~4	
多芯线(AWG/mm²)	22~10 / 0.5~4	
冲击耐压	8KV	
扭力(N·m)	0.67	
螺丝	M3.5	
剥线长度	10~12mm	
绝缘材料	PA	
TxHxW(mm)	8x55.9x72.5	
包装量	100	

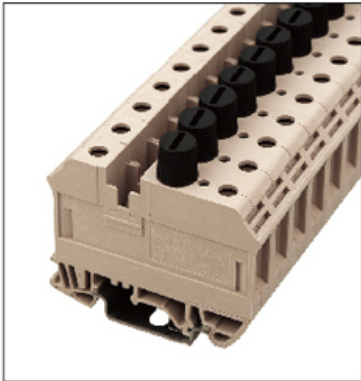

DK10-TF(5X20)		
安规认证 		
规格	UL	IEC
额定电压	600V	800V
额定电流	6.3A	6.3A
单芯线(AWG/mm²)	22~6 / 1.5~10	
多芯线(AWG/mm²)	22~6 / 1.5~10	
冲击耐压	8KV	
扭力(N·m)	1.8	
螺丝	M4	
剥线长度	12~16mm	
绝缘材料	PA	
TxHxW(mm)	12x47.2x61.63	
包装量	50	

DK10-TFA(5X20)		
安规认证 		
规格	UL	IEC
额定电压	600V	800V
额定电流	6.3A	6.3A
单芯线 (AWG/mm²)	22~6 / 1.5~10	
多芯线 (AWG/mm²)	22~6 / 1.5~10	
冲击耐压	8KV	
扭力(N·m)	1.8	
螺丝	M4	
剥线长度	12~16mm	
绝缘材料	PA	
TxHxW(mm)	12x47.2x61.63	
	50	

