


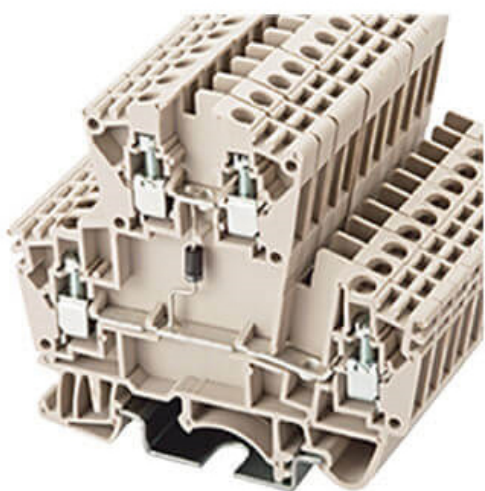
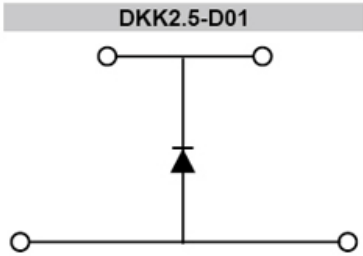



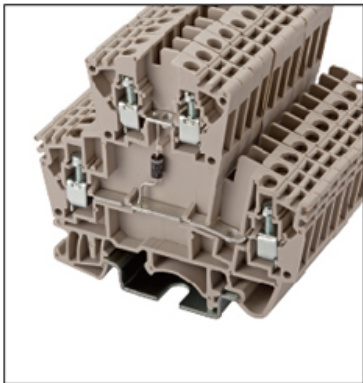


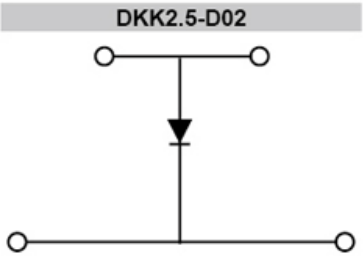



| 安规认证         |                 |       |
|--------------|-----------------|-------|
| 规格           | UL              | IEC   |
| 额定电压/正常电压    | 250V            | 250V  |
| 额定电流/电流强度    | 0.5A            | 0.5A  |
| 逆转电压         | 1000V           | 1000V |
| 单芯线(AWG/mm²) | 22~12 / 0.5~2.5 |       |
| 多芯线(AWG/mm²) | 22~12 / 0.5~2.5 |       |
| 冲击耐压         | 6KV             |       |
| 扭力(N·m)      | 0.4             |       |
| 螺丝           | M2.5            |       |
| 剥线长度         | 6mm             |       |
| 绝缘材料         | PA              |       |
| TxHxW(mm)    | 5.1x62.6x69.4   |       |
| 包装量          | 100             |       |

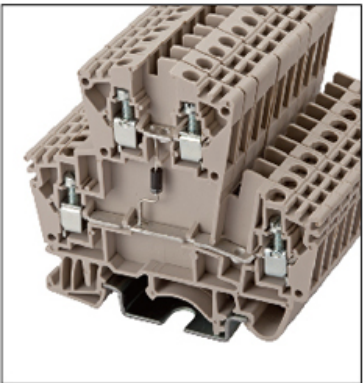

| 安规认证         |                 |       |
|--------------|-----------------|-------|
| 规格           | UL              | IEC   |
| 额定电压/正常电压    | 250V            | 250V  |
| 额定电流/电流强度    | 0.5A            | 0.5A  |
| 逆转电压         | 1000V           | 1000V |
| 单芯线(AWG/mm²) | 22~12 / 0.5~2.5 |       |
| 多芯线(AWG/mm²) | 22~12 / 0.5~2.5 |       |
| 冲击耐压         | 6KV             |       |
| 扭力(N·m)      | 0.4             |       |
| 螺丝           | M2.5            |       |
| 剥线长度         | 6mm             |       |
| 绝缘材料         | PA              |       |
| TxHxW(mm)    | 5.1x62.6x69.4   |       |
| 包装量          | 100             |       |

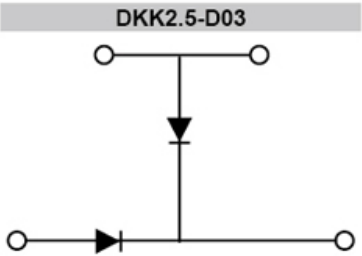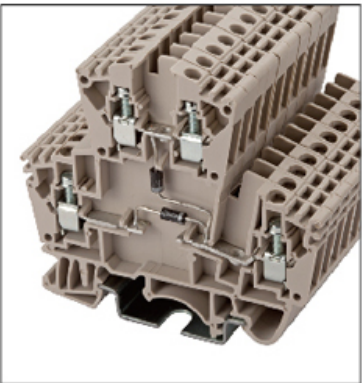

| 安规认证         |                 |       |
|--------------|-----------------|-------|
| 规格           | UL              | IEC   |
| 额定电压/正常电压    | 250V            | 250V  |
| 额定电流/电流强度    | 0.5A            | 0.5A  |
| 逆转电压         | 1000V           | 1000V |
| 单芯线(AWG/mm²) | 22~12 / 0.5~2.5 |       |
| 多芯线(AWG/mm²) | 22~12 / 0.5~2.5 |       |
| 冲击耐压         | 6KV             |       |
| 扭力(N·m)      | 0.4             |       |
| 螺丝           | M2.5            |       |
| 剥线长度         | 6mm             |       |
| 绝缘材料         | PA              |       |
| TxHxW(mm)    | 5.1x62.6x69.4   |       |
| 包装量          | 100             |       |

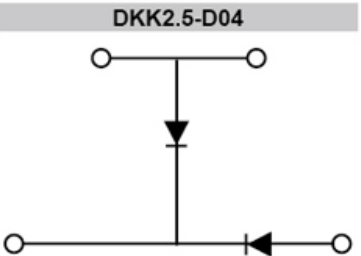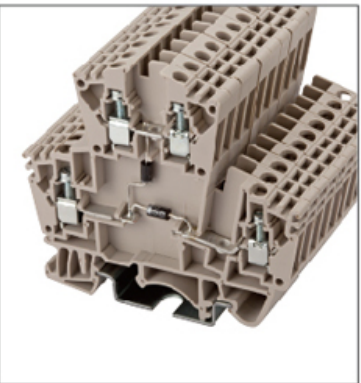

| 安规认证         |                 |       |
|--------------|-----------------|-------|
| 规格           | UL              | IEC   |
| 额定电压/正常电压    | 250V            | 250V  |
| 额定电流/电流强度    | 0.5A            | 0.5A  |
| 逆转电压         | 1000V           | 1000V |
| 单芯线(AWG/mm²) | 22~12 / 0.5~2.5 |       |
| 多芯线(AWG/mm²) | 22~12 / 0.5~2.5 |       |
| 冲击耐压         | 6KV             |       |
| 扭力(N·m)      | 0.4             |       |
| 螺丝           | M2.5            |       |
| 剥线长度         | 6mm             |       |
| 绝缘材料         | PA              |       |
| TxHxW(mm)    | 5.1x62.6x69.4   |       |
| 包装量          | 100             |       |

